40QNC024 with 38HDF024
13 SEER High Wall Duct–Free Split – Cooling Only with Puron® Refrigerant

Carrier®
Turn to the Experts.℠

Submittal Data

Job Data:_____ Location:_____

Buyer:_____ Buyer P.O.#_____Carrier # _____

Unit Number:_____ Model Number: _____

Performance Data Certified By: _____ Date: _____

40QNC

38HDF

Puron
the environmentally sound refrigerant

FEATURES

- 13 SEER / 11 EER
- Remote control standard
- Optional colored front panels
- Optional wired controls
- Auto restart on power failure
- De-humidification mode
- User selectable fan speeds (Auto, low, med, high)
- System diagnostics
- Cleanable filters
- Cooling to -20F using low ambient accessories
- Limited Warranty: 1-year on all parts/5-years on compressor

Indoor Unit - 40QNC / Outdoor Unit - 38HDF
(Unless otherwise indicated, data applies to both indoor and outdoor models)

SYSTEM SIZE 024
REFRIGERANT R-410A
OPERATING WEIGHT(lb)
Indoor 31
Outdoor 176
PERFORMANCE
Nominal Capacity
Indoor (Btuh) 24,000
Outdoor (Tons) 2.0
SEER 13
Moisture Removal Rate(Pints/hr) 7.9
Airflow (Low/Med/High) . . . . . 460 / 525 / 645
ELECTRICAL
Power Wires . . . . . 10 AWG
System Voltage 208/230
MCA
Indoor 0.48
Outdoor 16.8
MOCP
Indoor 15
Outdoor 25
Fan Motor (Indoor) (FLA) 38
Motor Watts 64
CONTROLS
Control Remote (Standard) . . . . . Wireless
Control Voltage 24v
Control Wiring (0-50 ft.) . . . . . 18 AWG
Control Wiring (75-200 ft.) . . . . . 16 AWG
REFRIGERANT LINES (Insulate both lines)
Mixed Phase Line (in.) OD 3/8
Vapor Line (in.) OD 5/8
Metering/Control Device . . . . . Accurater Piston at outdoor unit

Condensate Pump:	Standard ☐	Accessory ☐	Not Required ☐
Crankcase Heater:	Standard ☐	Accessory ☐	Not Required ☐
Isolation Relay:	Standard ☐	Accessory ☐	Not Required ☐
Low Ambient Kit:	Standard ☐	Accessory ☐	Not Required ☐
Remote Control Lock Mounting Kit:	Standard ☐	Accessory ☐	Not Required ☐
Room Control Wiring Kit (Multiple Units):	Standard ☐	Accessory ☐	Not Required ☐
Stacking Kit:	Standard ☐	Accessory ☐	Not Required ☐
Wind Baffle:	Standard ☐	Accessory ☐	Not Required ☐
Winter Start Kit:	Standard ☐	Accessory ☐	Not Required ☐
Wired Room Control (One Unit):	Standard ☐	Accessory ☐	Not Required ☐
Zone Manager:	Standard ☐	Accessory ☐	Not Required ☐
Zone Manager Wiring Kit:	Standard ☐	Accessory ☐	Not Required ☐

UNIT DIMENSIONS – INDOOR MODEL

UNIT SIZE	INDOOR MODEL	WIDTH (IN.) A	HEIGHT (IN.) B	DEPTH (IN.) C
24	40QNC024–3	42–1/2	11–3/4	8

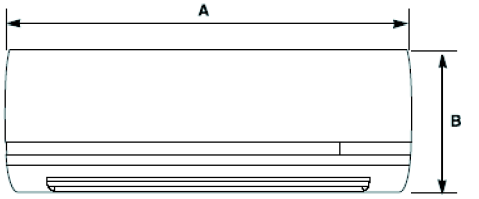

Fig. 1 – 40QNC Dimensions

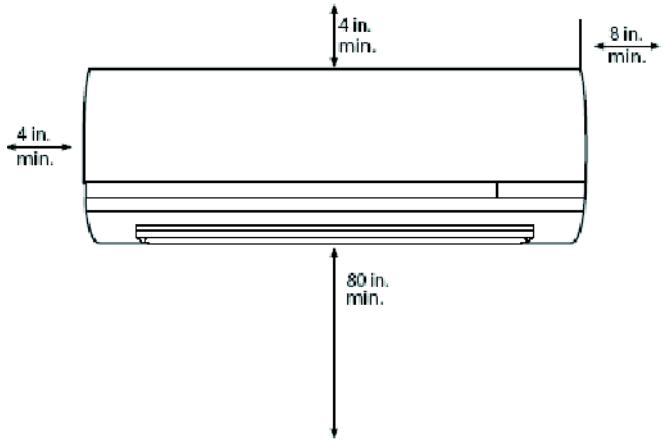

Fig. 2 – 40QNC Clearance

UNIT DIMENSIONS – OUTDOOR MODEL

UNIT SIZE	OUTDOOR MODEL	WIDTH (IN.) A	HEIGHT (IN.) B	DEPTH (IN.) C
24	38HDF024–––3	36–15/16	25–1/8	14–5/8

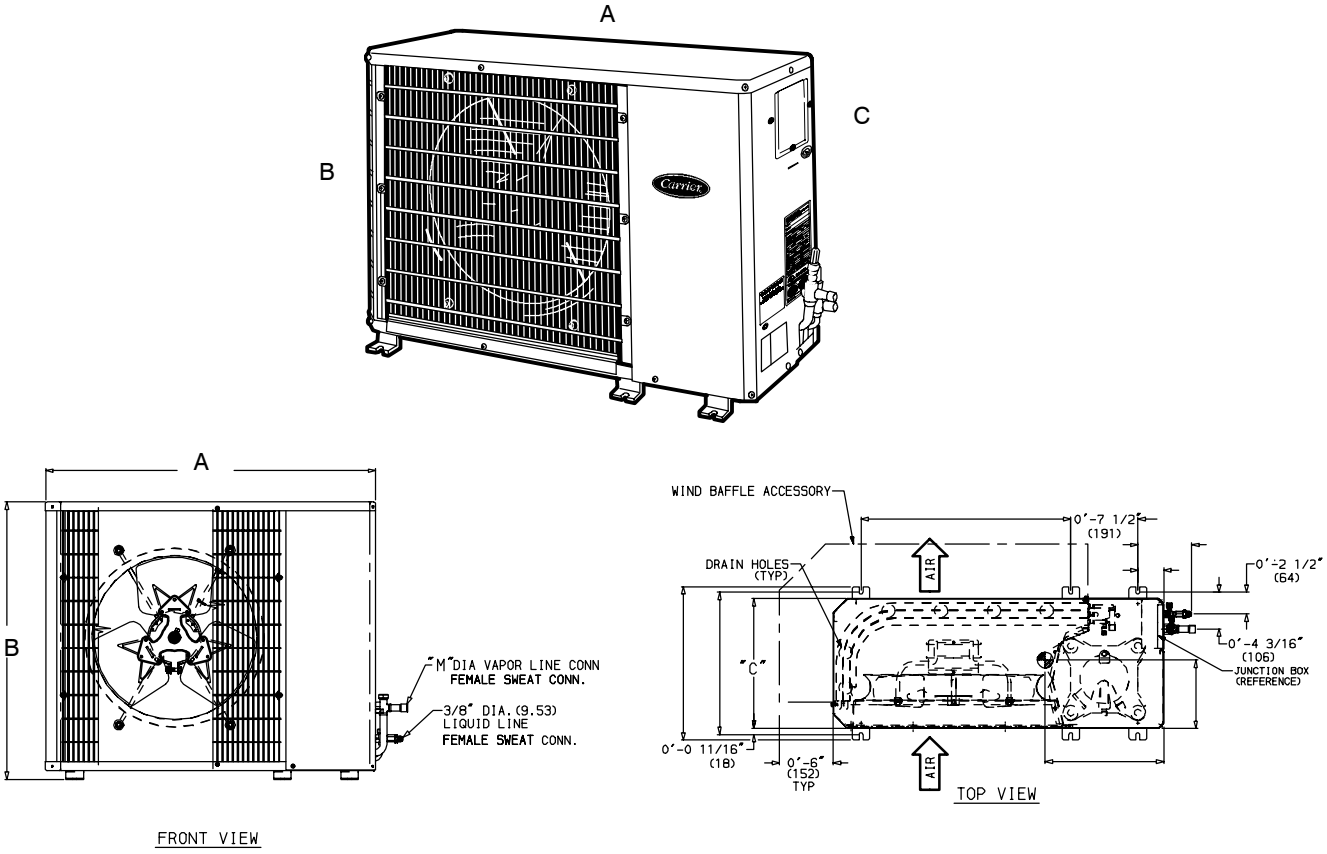

Fig. 3 – 38HDF DIMENSIONS

Copyright 2007 Carrier Corp. • 7310 W. Morris St. • Indianapolis, IN 46231 Printed in U.S.A. Edition Date: 02/07 **Catalog No: 40QNC24-38HDF24-2SB**

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations. Replaces: 40QNC24_38HDF24-1SB